

AT-AOC-25G-xM

Active Optical Cable

25/G SFP 28 Active Optical Cable, AOC MMF 850nm 1-100m



FEATURES

- Supports 25Gbps data rate
- Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- Support hot-pluggable
- Excellent ESD protection
- Single 3.3V power supply
- Low power consumption
- Operating case temperature 0° C to +70° C

APPLICATION

- 25GBASE-SR Ethernet
- 32G Fiber Channel

STANDARD

- SFF-8431 Electrical MSA
- SFF-8432 Mechanical MSA
- RoHS compliant

Absolute Maximum Ratings

Parameter	Symb ol	Min	Max	Unit
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	RH	0	85	%
Supply Voltage	Vcc	-0.5	3.6	V

Recommended Operating Conditions

Anda Telecom Pvt. Ltd.
Registered office : E-38, Sec 06, Noida, Gautambudha Nagar, Uttar Pradesh - 201301, INDIA
Phone : +91 120 4109590, +91 98716 50366
E-mail : Info@andatelecom.com URL : www.andatelecom.com

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Tc	0		+70	°C
Power Supply Voltage	Vcc	3.14	3.3	3.46	V
Power Supply Current	Icc			300	mA
Data Rate			25.78		Gbps
Bit Error Ratio	BER		10 ⁻⁸		

Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Transmitter						
Input differential impedance	Rin		100		Ω	1
Differential data input swing	Vin,pp	150		700	mV	
Transmit Disable Voltage	VD	2		Vcc	V	
Transmit Enable Voltage	VEN	Vee		Vee+0.8	V	
Receiver						
Differential data output swing	Vout,p	300		850	mV	2,5
Data output rise time, fall time	tr	28			ps	3
LOS Fault	V _{LOS fault}	2		V _{CCHOST}		4
LOS Normal	V _{LOS norm}	Vee		Vee+0.8		4

Notes:


1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC
2. Into 100Ω is differential termination.
3. 20 – 80%. Measured with Module Compliance Test Board and OMA test pattern.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1.
5. Host board designers using an EDC PHY IC should follow the IC manufacturer's recommended settings for interoperating the host-board EDC PHY with a limiting receiver.

Pin Definitions

The SFP28 modules are hot-pluggable. Hot pluggable refers to plugging in or unplugging a module while the host board is powered. The SFP28 host connector is a 0.8 mm pitch 20 position right angle improved connector specified by SFF-8431, or stacked connector with equivalent electrical performance. SFP28 module contact mates with the host in the order of ground, power.

Registered office : E-3

E-mail : info@anda.com

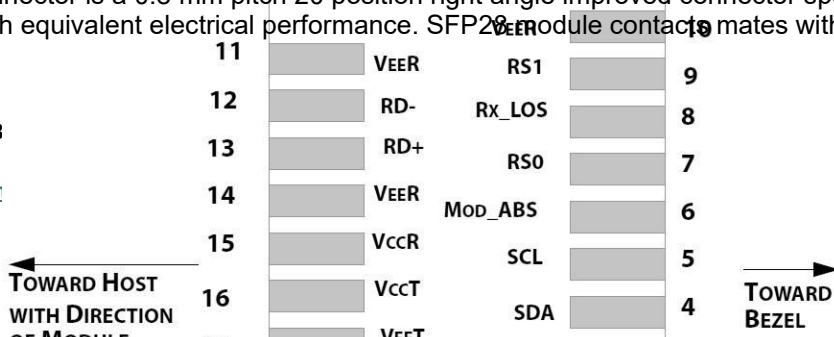

Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1st	1
2	TX_Fault	Transmitter Fault	3rd	2
3	TX_Disable	Transmitter Disable	3rd	3
4	SDA	2-Wire Serial Interface Data Line	3rd	4
5	SCL	2-Wire Serial Interface Data Line	3rd	4
6	Mod_ABS	Module Absent, Connect to VeeT or VeeR in Module	3rd	5
7	RS0	No connection required	3rd	6
8	RX_LOS	Receiver Loss of Signal indication	3rd	7
9	RS1	No connection required	3rd	8
10	VeeR	Receiver Ground	1st	1
11	VeeR	Receiver Ground	1st	1
12	RD-	Receiver Inverted DATA out. AC Coupled. CML-O	3rd	9
13	RD+	Receiver Non-inverted DATA out. AC Coupled. CML-O	3rd	9
14	VeeR	Receiver Ground	1st	1
15	VccR	Receiver Power Supply	2nd	10
16	VccT	Transmitter Power Supply	2nd	10
17	VeeT	Transmitter Ground	1st	1

Anda Telecom Pvt. Ltd.

Registered office : E-38, Sec 06, Noida, Gautambudha Nagar, Uttar Pradesh - 201301, INDIA

Phone : +91 120 4109590, +91 98716 50366

E-mail : Info@andatelecom.com

URL : www.andatelecom.com


18	TD+	Transmitter Non-Inverted DATA in. AC Coupled. CML-I	3rd	11
19	TD-	Transmitter Inverted DATA in. AC Coupled. CML-I	3rd	11
20	VeeT	Transmitter Ground	1st	1

Notes:

1. Plug Seq.: Pin engagement sequence during hot plugging.
2. The module signal ground contacts.
3. This pin is an open drain/collector and should be pulled up to Vcc-host in the host with a 4.7k~10k Ohm resistor.
4. This pin should be pulled up to Vcct with a 4.7k~10k Ohm resistor in modules.
5. SDA&SCL (IIC) are needed pull up 4.7k~10k Ohm resistors on host board.
6. Mod_ABS is connected to VeeT or VeeR in the SFP+ module.
7. Rate Select 0,no connection required.
8. Module RX_Los of signal indication need pull up 4.7k~10k Ohm resistor on host board.
9. Rate Select 1,no connection required.
10. RD +/-: These are the differential receiver outputs. They are CML AC-coupled with 100 Ohm terminal resistor matching internal.

Mechanical Dimensions

Dimensions are in millimeters. All dimensions are $\pm 0.2\text{mm}$ unless otherwise specified. (unit: mm)

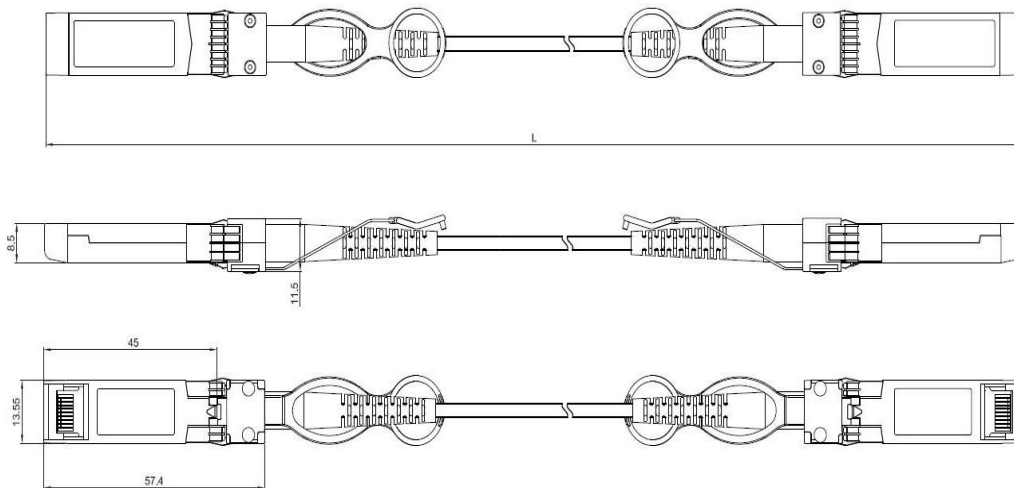

This transceiver is specified as ESD threshold 500V for Signal pads and 2kV for all others electrical input pads, tested per MIL-STD-883, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

Ordering information

Model No.	Product Description
AT- AOC-25G-xM	25G SFP+ to SFP+ Active Optical Cable 1-100m
x: 001~100 meters	

ORDERING INFORMATION: -

<p>Anda Telecom Pvt. Ltd. Registered Office: PLOT NO 38, BLOCK E, -, Sector 6, Noida, Gautambuddha Nagar, Uttar Pradesh, 201301</p> <p>India.</p>	  	<p>https://andatelecom.com/</p> <p>+91 120 4109590 + 91 98716 50366</p> <p>info@andatelecomindia.com</p>
---	---	---