


WDM

FWDM

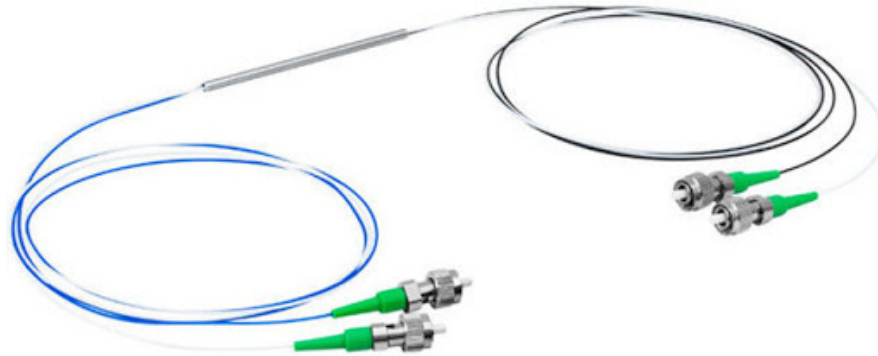

FEATURES

- ☞ Wide Operating Wavelength Range
- ☞ Low insertion loss
- ☞ Low Polarization Dependent Loss
- ☞ High Channel Isolation
- ☞ Specified Wavelength Available

APPLICATIONS

- WDM Network
- CATV Network
- Fiber Optical Amplifier
- MAN & Access Network

PERFORMANCE SECTION

Parameter	unit	Value		
Pass Wavelength	nm	1480~ 1500	1540~1560	1260~1360 &1480~1500

ANDA Telecom Pvt. Ltd.

Registered office: E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA

Phone: +91 11 41323629, +91 95 302 57173

E-mail: Info@andatelecomindia.com

URL: www.andatelecomindia.com

Reflected Wavelength 1		nm	1260~1360	1260~1360	1540~1560
Reflected Wavelength 2		nm	1540~1560	1480~1500	
Insertion loss	Pass	dB	≤0.6		
	Reflect	dB	≤0.4		
Isolation	Pass	dB	>30		
	Reflect	dB	>15		
Polarization Dependent Loss		dB	≤0.2		
Polarization Mode Dispersion		ps	≤0.1		
Directivity		dB	≥50		
Return Loss		dB	≥45		
Operation Temperature		°C	-5~+70		
Storage Temperature		°C	-40~+85		
Package dimension	Steel tube	mm	φ5.5x38 or specified		
	ABS box	mm	90x20x10 or specified		
Connector		-	LC/PC or specified		

Product Series	COMM Channel	Pass Channel	Reflected Channel	Package	Terminal	Connector	Fiber Type	Fiber Length
F=FWDM	1310/1490/1550	T14=T1490	R35=R1310/1550	M=Steel tube	F=With connector	SU SA	0.9A=0.9 mm G657A2	05=0.5m
		T15=1550	R34=R1310/1490	B=Box	N=No connector	LU LA	2.0A1=2.0 mm G657A1	10=1m
		T34=T1310/1490	R15=R1550			FU FA	Rb= Bare fiber	20=2m

ANDA Telecom Pvt. Ltd.

Registered office: E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA

Phone: +91 11 41323629, +91 95 302 57173

E-mail: Info@andatelecomindia.com

URL: www.andatelecomindia.com