

ISO 9001:2008 Certified Company

## 2 In 1 Monitor Lightning Arrester

**Model: M10-220/D12BM**



### APPLICATIONS:

Designed to protect monitor equipments (Power, Video), widely applied in bank monitor & safe guard system.

Monitor equipment for school, enterprise, road etc. security and protection.

### FEATURES:

- Multi. Protection circuits, Gas-Tube+ TVS technology
- Dual protection in Common module and different module
- 2 in 1 protection
- TVS array technology, low capacitance
- Multi-Strike Capability

### TECHNICAL PARAMETER :

Model	M10-220/D12BM
<b>Electrical Parameter</b>	
<i>Video Part</i>	
Max. continuous operating voltage Uc	12V
Nominal discharge current (8/20μs) ) In	3kA
Max. discharge current (8/20μs) ) Imax	5kA
Line-line	40V
Line-ground	500V
Adapt transmission rate	100Mbps
Insertion loss	0.5dB
Response time tA	1ns
Impedance	75 Ω
Interface form	BNC
<i>Power Part</i>	
Working voltage	220V AC
Max. continuous operating voltage	385V AC
Nominal discharge current (8/20μs)	5kA
Max. discharge current (8/20μs)	10kA
Protection level (8/20μs)	900V
Interface form	2P Compression plug

**ANDA Telecom Pvt. Ltd.**


ISO 9001:2008 Certified Company

Registered office : E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA


Phone : +91 11 41323629, +91 93 502 57173

E-mail : [Info@andatelecomindia.com](mailto:Info@andatelecomindia.com)

URL : [www.andatelecomindia.com](http://www.andatelecomindia.com)



ISO 9001:2008 Certified Company

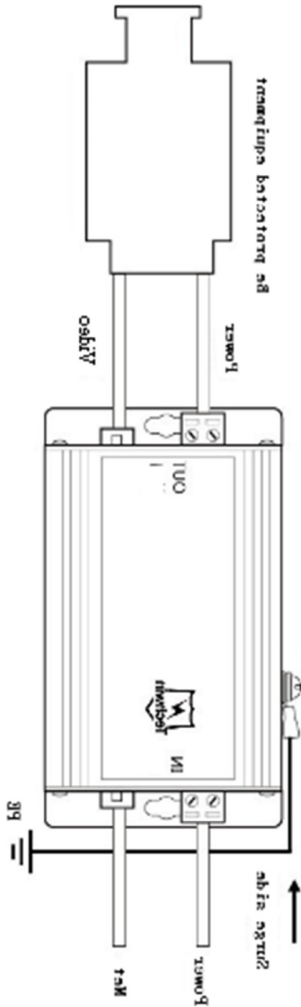

**Mechanical characteristics**

Dimension	126(L) ×55(W) ×25(H)mm
Weight per unit	150g
IP Code	IP20
Working conditions	Temperature: -40 to 80°C, Relative humidity: ≤95%

Standards Compliance IEC61643-1, UL V-90, RoHS

**ANDA Telecom Pvt. Ltd.**

*ISO 9001:2008 Certified Company*

Registered office : E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA

Phone : +91 11 41323629, +91 93 502 57173

E-mail : [Info@andatelecomindia.com](mailto:Info@andatelecomindia.com)

URL : [www.andatelecomindia.com](http://www.andatelecomindia.com)