

# Product Specification

## 10Gbps BiDi SFP+ Transceiver

### AT- SFPP10GBD2710D

#### Product Features

- Up to 10Gbps data links
- 10km with 9/125µm SMF \*1
- WDM TX1270/RX1330nm DFB/PIN laser
- **Simplex LC Connector**
- Hot-pluggable SFP+ footprint
- Single 3.3V power supply
- Operating temperature: 0°C to 70°C
- RoHS
- Digital Diagnostic Monitor (DDM)



#### Applications

- √ 10GBase Ethernet
- √ 10G FC

\*1 Notice

PART NUMBER	DISTANCE	LASER
AT- SFPP10GBD2710D	10KM	DFB/PIN

## 1. Product Description

The AT- SFPP10GBD2710D is a 10Gbps enhanced small form factor pluggable SFP+ transceiver compatible with 10GBASE Ethernet and 10G Fiber Channel. It is suitable for single-mode fiber (SMF) communications in 10Gbps Ethernet and 10G Fiber Channel by single fiber.

PART NUMBER	AT- ASP COLOR
AT- SFPP10GBD2710D	BLUE

## 2. Regulatory Compliance

ANDA TELECOM transceivers are AT- ass 1 Laser Products comply with FDA regulations. Meet AT- ass 1 eye safety requirements of EN 60825 and the electrical safety requirements of EN 60950.

## 3. Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	Vcc	-0.5	4	V
Storage Temperature	Ts	-40	85	°C
Operating Case Temperature	Tc	0	70	°C

## 4. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T <sub>c</sub>	0		70	°C
Power Supply Voltage	V <sub>cc</sub>	3.15	3.3	3.45	V
Power Supply Current	I <sub>cc</sub>			300	mA
Data Rate			10		GBps
Max Link Length on 9/125µm SMF	L <sub>max</sub>		10		km

## 5. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>					
Centre Wavelength	$\lambda_c$	1260	1270	1280	nm
Spectral Width (-20dB)	$\sigma$			1	nm
Average Output Power	P <sub>out</sub>	-5		5	dBm
Extinction Ratio	ER	3.5			dB
Average Launch Power of Off Transmitter	P <sub>off</sub>			-30	dBm
<b>Receiver</b>					
Centre Wavelength	$\lambda_c$	1320	1330	1340	nm

Receiver Sensitivity	P <sub>IN</sub>			-14	dBm
Receiver Overload	P <sub>max</sub>	3			dBm
LOS De-Assert	LOS <sub>D</sub>			-19	dBm
LOS Assert	LOS <sub>A</sub>	-21			dBm
LOS Hysteresis		0.5		4.5	dB

## 6. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>					
Input Differential Impedance	Z <sub>in</sub>	90	100	110	Ω
Data Input Swing Differential	V <sub>in</sub>	250		1200	mV
Tx-Dis Disable	V <sub>d</sub>	2.0		V <sub>cc</sub>	V
Tx-Dis Enable	V <sub>en</sub>	0		0.8	V
<b>Receiver</b>					
Data Output Swing Differential	V <sub>out</sub>	250		800	mV
Rx-Los Fault	V <sub>lf</sub>	2.0		V <sub>ccHOST</sub>	V
Rx-Los Normal	V <sub>ln</sub>	0		0+0.8	V
Output rise and fall time	Tr, Tf	30			ps

## 7. Pin Descriptions

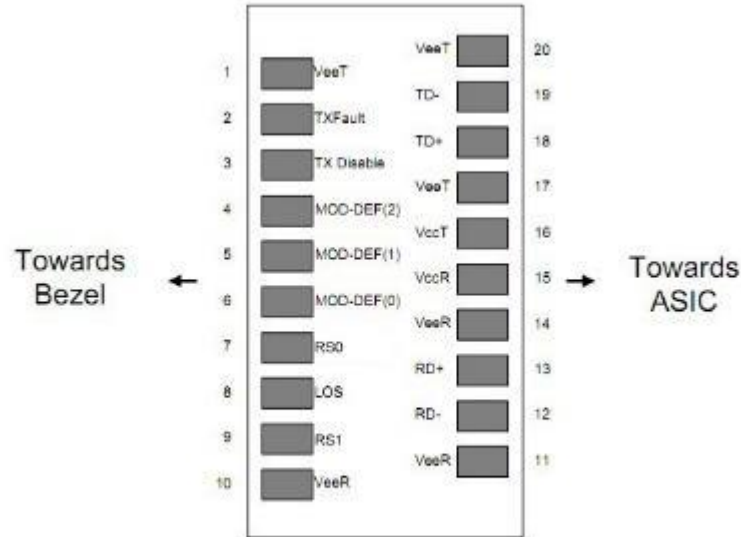


Diagram of Host Board Connector Block Pin Numbers and Names

Pin	Symbol	Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	7.2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	7.3
5	MOD_DEF(1)	Module Definition 1. AT- ock line for Serial ID.	7.3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	7.3
7	RS0	Rate Select0, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
8	LOS	Loss of Signal indication. Logic 0 indicates normal	7.4

		operation.	
9	RS1	Rate Select1, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
10	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
11	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	7.1

Notes:

7.1 Circuit ground is internally isolated from chassis ground.

7.2 Laser output disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V.

7.3 Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V

and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.

7.4 LOS is open collector output. Should be pulled up with 4.7k -10kohms on host

board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic

1 indicates loss of signal.

## 8. EEPROM & DDM THRESHOLD

### 8.1 EEPROM

**2 wire address 1010000X (A0h)**

0~95 Serial ID Defined by SFP MSA (96 bytes)
96~127 Vendor Speific (32 bytes)
128~255 Reserved (128 bytes)


### 8.1 DDM THRESHOLD

**AT- SFPP10GBD2710D**

	<b>Low Alarm</b>	<b>Low Warn</b>	<b>High Warn</b>	<b>High Alarm</b>
Temperature	-5°C	0°C	70°C	75°C
Voltage	3V	3.1V	3.6V	3.7V
Tx Bias	15mA	20mA	75mA	85mA

Tx Power	-8dBm	-7dBm	5dBm	6dBm
Rx Power	-20dBm	-18dBm	0.5dBm	1.5dBm

## 9. Mechanical Specifications

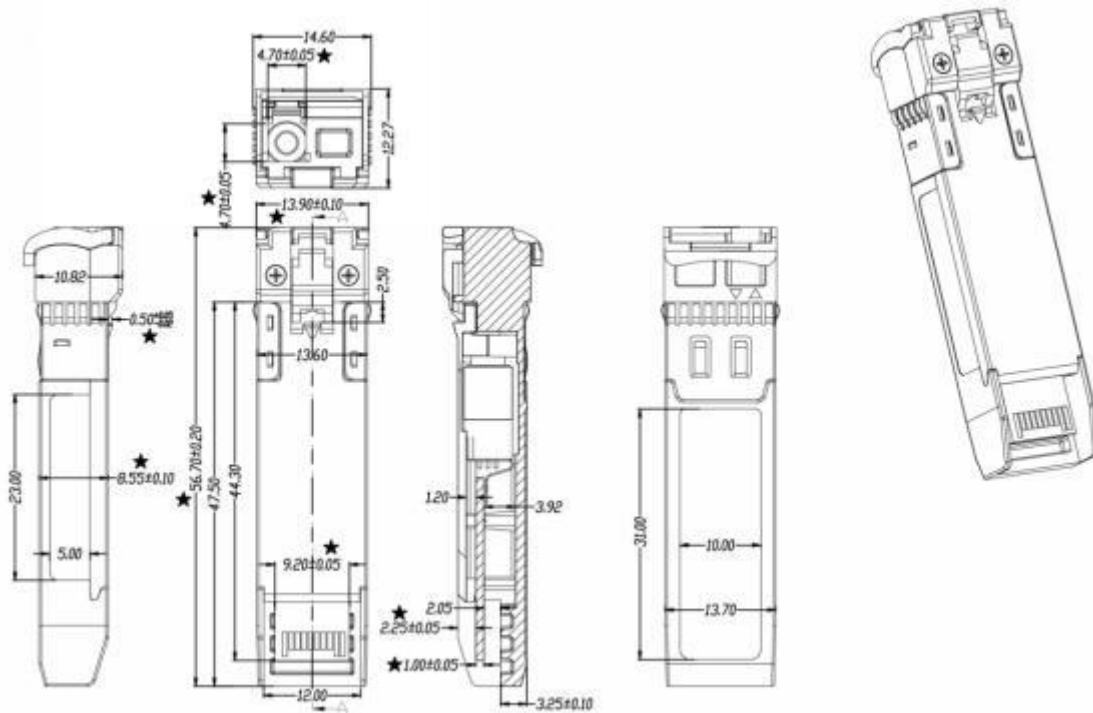

## 10. LABEL

ANDA TELECOM offers label OEM design and print.

Label barcode supports code128 and 2D barcode

SIZE: 30mm\*10mm



## Ordering Information

Part No.	Data Rate	DDM	TX/RX	Fiber Type	Dist.	Temp.	Optical Interface
AT-SFPP10GBD2710D	10Gbps	yes	1270nm/ 1330nm	SMF	10km	0~70°C	BiDi LC

## VERSION UPDATE:

VERSION NO.	DATE	UPDATED INFORMATION
V20161010	20161010	1. NEW PUBLISHED

## NOTICE:

ANDA TELECOM reserves the right to make changes to this product in this specification without notice, in order to improve product performance.