

AT-SFP-M1085L-03

Optical SFP Module

10Gbps SFP+ Transceiver, MM, 850nm, 300mm LC



FEATURES

- Supports up to 10.7Gbps bit rates
- 850nm VCSEL laser and PIN photodiode, Up to 300m for OM3-MMF transmission
- Compliant with SFP+ MSA and SFF-8472 with duplex LC receptacle
- Hot-pluggable SFP+ footprint
- Real Time Digital Diagnostic Monitoring
- Single +3.3V power supply
- Compatible with RoHS
- Operating case temperature: Standard: 0 to +70° C Industrial: -40 to +85° C

APPLICATION

- 10GBASE-SR & 10G Ethernet
- 10G Fiber Channel

STANDARD

- Compliant with MSA SFP specification(SFF-8431, SFF-8432, SFF-8472)
- Compliant with IEC
- Compliant with IEEE 802.3ae

DESCRIPTION

The SFP+ transceivers are high performance, cost effective modules supporting data rate of 10.3Gbps. The transceiver consists of three sections: a VCSEL laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements. The transceivers are compatible with SFP Multi-Source Agreement and SFF-8472 digital diagnostics functions

Anda Telecom Pvt. Ltd.


Registered office : E-38, Sec 06, Noida, Gautambudha Nagar, Uttar Pradesh - 201301, INDIA

Phone : +91 120 4109590, +91 98716 50366

E-mail : Info@andatelecom.com

URL : www.andatelecom.com

Fiber type	Minimum modal bandwidth @ 850 nm (MHz•km)	Operating range (meters)
62.5 μm MMF	160	2 to 26
	200	2 to 33
50 μm MMF	400	2 to 66
	500	2 to 82
	2000	2 to 300

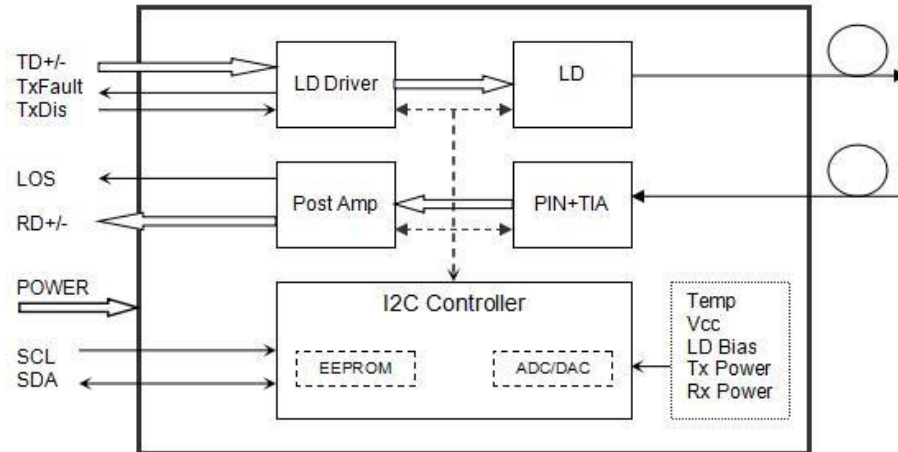

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	0	4.5	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Standard	Tc	0	+70	°C
	Industrial	Tc	-40	+85	°C
Power Supply Voltage	Vcc	3.135	3.30	3.465	V
Power Supply Current	Icc			260	mA
Data Rate			10.3	10.7	Gbps
Transmission Distance			300		m

OPTICAL AND ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Min	Typical	Max	Unit	Notes
Transmitter							
Centre Wavelength		λ_c	840	850	860	nm	
Side-Mode Suppression Ratio		SMS R	-	-	-	dB	
Average Output Power		Pout	-6.0		-0.5	dBm	1
Extinction Ratio		ER	3.0			dB	
Data Input Swing Differential		VIN	180		950	mV	2
Input Differential Impedance		ZIN	90	100	110	Ω	
TX Disable	Disable		2.0		Vcc	V	
	Enable		0		0.8	V	
TX Fault	Fault		2.0		Vcc	V	
	Normal		0		0.8	V	
Receiver							
Centre Wavelength		λ_c	840	850	860	nm	
Receiver Sensitivity					-10.5	dBm	3
Receiver Overload			0.5			dBm	3
LOS De-Assert		LOS D			-12	dBm	
LOS Assert		LOS A	-22			dBm	
LOS Hysteresis			0.5		4	dB	
Data Output Swing Differential		Vout	500	700	900	mV	4
LOS	High		2.0		Vcc	V	
	Low				0.8	V	

NOTES

1. The optical power is launched into MMF.
2. PECL input, internally AC-coupled and terminated.
3. Measured with a PRBS $2^{31}-1$ test pattern @10312Mbps, BER $\leq 1 \times 10^{-12}$.
4. Internally AC-coupled.

TIMING AND ELECTRICAL

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock		100	400	KHz
MOD_DEF (0:2)-High	V _H	2		V _{cc}	V
MOD_DEF (0:2)-Low	V _L			0.8	V

DIAGNOSTICS

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal
	-40 to +85			
Voltage	3.0 to 3.6	V	±3%	Internal
Bias Current	0 to 15	mA	±10%	Internal
TX Power	-6.0 to -0.5	dBm	±3dB	Internal
RX Power	-16 to -1	dBm	±3dB	Internal


DIGITAL DIAGNOSTIC MEMORY MAP

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).


The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following

2 wire address 1010000X (A0h)

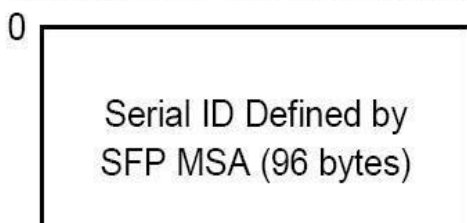


2 wire address 1010001X (A2h)

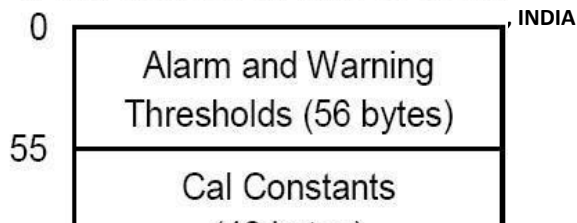

PIN DEFINITIONS

Pin Diagram

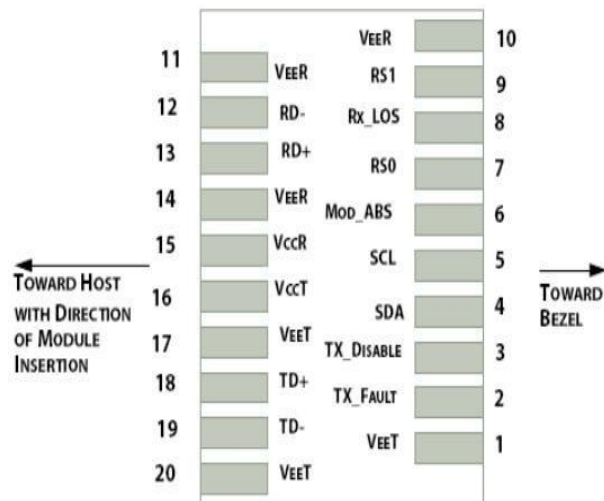

Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX_FAULT	Transmitter Fault Indication	3	Note 1
3	TX_DISABLE	Transmitter Disable	3	Note 2
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	

6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	Note 3
9	V _{EER}	Receiver ground	1	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 4
13	RD+	Received Data Out	3	Note 4
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 5
19	TD-	Inv. Transmit Data In	3	Note 5
20	V _{EET}	Transmitter Ground	1	

NOTES

Plug Seq.: Pin engagement sequence during hot plugging.

TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V_{cc}+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.


Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.

LOS is open collector output. Should be pulled up with 4.7k~10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.


RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.

TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module

RECOMMENDED INTERFACE CIRCUIT

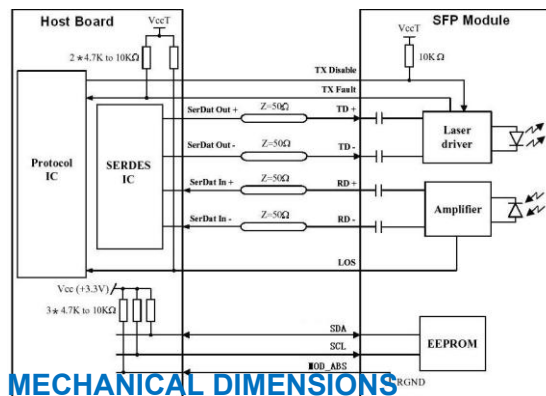

MECHANICAL DIMENSIONS

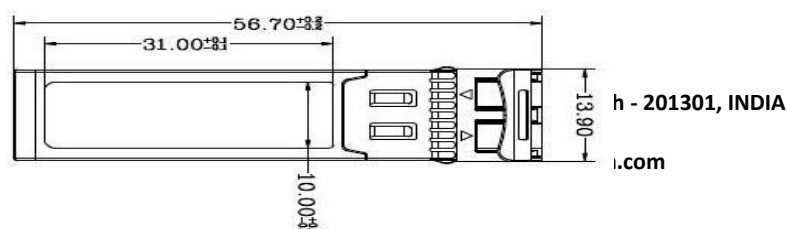

h - 201301, INDIA

i.com

ORDER INFORMATION

Model No.	Product Description
AT-SFP-M1085L-03	10Gbps, 850nm, LC, 300m, 0° C~+70° C, with DDM
AT-SFP-M1085L-03I	10Gbps, 850nm, LC, 300m, -40° C~+85° C, with DDM

ORDERING INFORMATION: -

Anda Telecom Pvt. Ltd. Registered Office: PLOT NO 38, BLOCK E, -, Sector 6, Noida, Gautambuddha Nagar, Uttar Pradesh, 201301 India.	 https://andatelecom.com/  +91 120 4109590 + 91 98716 50366  info@andatelecomindia.com
--	---