

Switch Lightning Arrester

Model: D05J8H-8




APPLICATIONS:

- CAT5e and CAT5 compatible
- 10/100/1000 Base-T Ethernet protection
- LAN, FDDI, CDDI, ATM
- PDH, SDH, SPDH
- Industrial control

FEATURES:

- Multi. Protection circuits, Gas-Tube+ TVS technology
- Dual protection in Common mode and differential mode
- TVS array technology, low capacitance
- Multi-Strike Capability

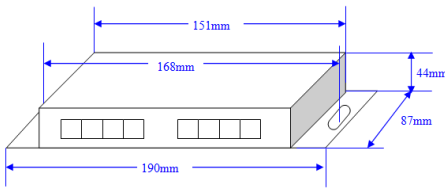

Dimension

TECHNICAL PARAMETER:

Model	D05J8H-8
Electrical Parameter	
Max. continuous operating voltage U_c	5V
Nominal discharge current (8/20 μ s) I_n	3kA
Max. discharge current (8/20 μ s) I_{max}	5kA
Limiting voltage (10/700 μ s) U_p	
Line-line	25V
Line-ground	500V
Adapt transmission rate	1000Mbps
Insertion loss	0.5dB
Protection line	1-8
Response time t_A	1ns
Interface form	RJ45
Protection way	2
Protection port	8
Mechanical characteristics	
Dimension	190(L) × 86(W) × 44(H)mm
Weight per unit	600g

ANDA Telecom Pvt. Ltd.

ISO 9001:2008 Certified Company

Registered office : E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA

Phone : +91 11 41323629, +91 93 502 57173

E-mail : Info@andatelecomindia.com

URL : www.andatelecomindia.com



ISO 9001:2008 Certified Company

IP Code	IP20
Working conditions	Temperature: -40 to 80°C, Relative humidity: ≤95%
Standards compliance	IEC61643-1, RoHS

ANDA Telecom Pvt. Ltd.

ISO 9001:2008 Certified Company

Registered office : E-36, Amar Colony, Lajpat Nagar-IV, New Delhi - 110024, INDIA

Phone : +91 11 41323629, +91 93 502 57173

E-mail : Info@andatelecomindia.com

URL : www.andatelecomindia.com